


OSM/LUM PROVISIONAL DECISION SHEET (PDSH)

Standard(s) (incl. year)	Subclause(s)	Tracking No.	Year
EN 60598-1:2015 – A1:2018	3.2.12	PDSH 2146	2019
Category			
LITE			
Subject	Keywords	Developed by	To be approved at
Termination marking	<ul style="list-style-type: none"> - Terminal block - DALI conductors - Sticker with symbols 	OSM/LUM-ETF5	2020 ETICS Plenary Meeting

Question

- a) Can the manufacturer use terminal blocks marked with symbols L1, L2, L3, N, $\frac{1}{\text{---}}$ for connection to control circuits (DALI)? Terminal L1 is used for mains supply. Terminals L2 and L3 are used for DALI conductors.
- b) Is it allowed to use a sticker with symbols to replace markings on terminal blocks?

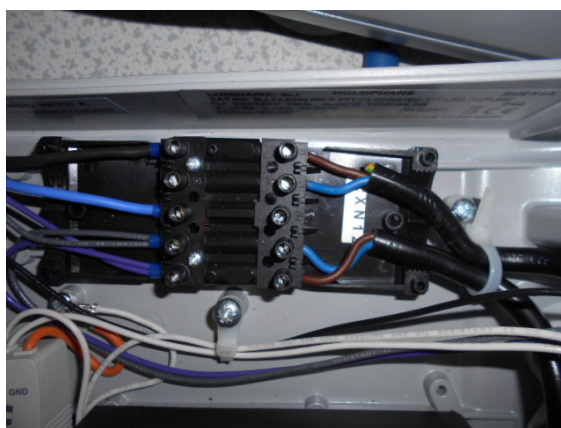

Decision

- a) No, terminals marked with L are intended to be connected to mains supply.
- b) Yes, if the marking on the terminals are covered it is acceptable.

Explanatory notes
