

OSM/LUM DECISION SHEET (DSH)

Standard(s) (incl. year)	Subclause(s):	Tracking No.	Year
EN 60598-1:2015/A1:2018			
Category:	0.4	DSH 0817A	2019
LITE			
Subject:	Key words:	Developed by	Approved at
Floodlight with mounting accessories	- Floodlight - Mounting accessories - Part of installation	OSM/LUM-ETF5	2019 ETICS Plenary Meeting

Question

The figures given in Annex describe different mounting possibilities for a floodlight.

- 1) Figure A: floodlight alone.
- 2) Figure B: floodlight with accessory wall bracket + connecting box.
- 3) Figure C: floodlight with accessory wall bracket + connecting box including terminal.
- 4) Figure D: floodlight with accessory wall bracket + connecting box including terminal and cord for internal wiring.

When the accessories are delivered with the luminaires, which configurations are acceptable?

Decision

Figures A - B - D – acceptable. Note for B: installation instructions are required.

Figure C - not acceptable, because internal wiring is missing between the lamp compartment and the terminal block in the wall bracket.

Explanatory notes ---



CONNECTING BOX INCLUDING SUPPLY TERMINAL BLOCK FLOODLIGHT

FIGURE A: Floodlight Alone.

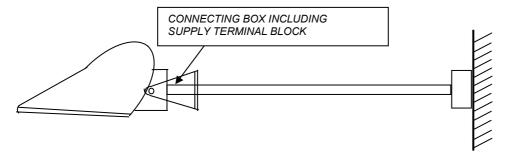


FIGURE B: Floodlight with accessory wall bracket + connecting box.

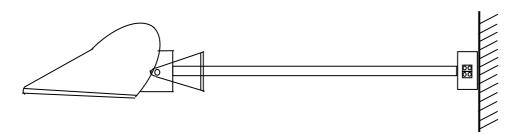


FIGURE C: Floodlight with accessory wall bracket + connecting box including terminal.

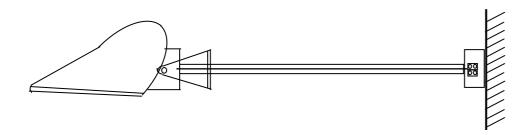


FIGURE D: Floodlight with accessory wall bracket box including terminal and cord (internal wiring) to be mounted by the user.